

# Pro


## SOUND REINFORCEMENT LOUDSPEAKERS ALTAVOCES DE REFUERZO INSTRUMENTAL DE BAJA FRECUENCIA




8 M 100




10 G 150

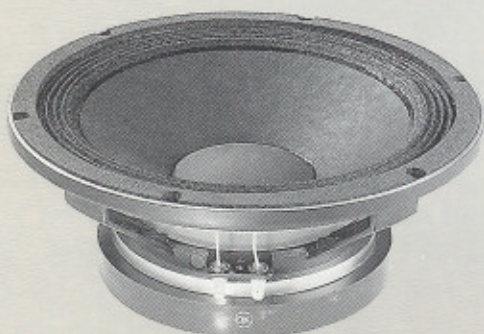


10 G 200

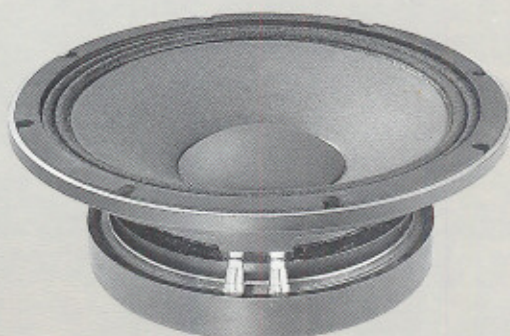

12 G 320

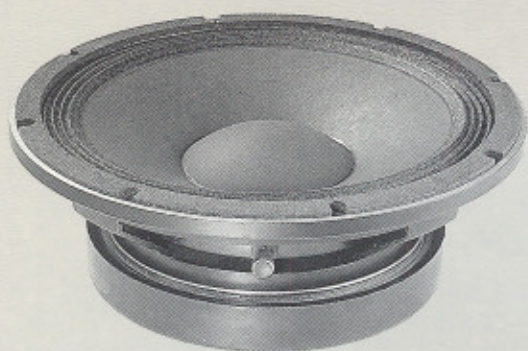

12 G 250/R

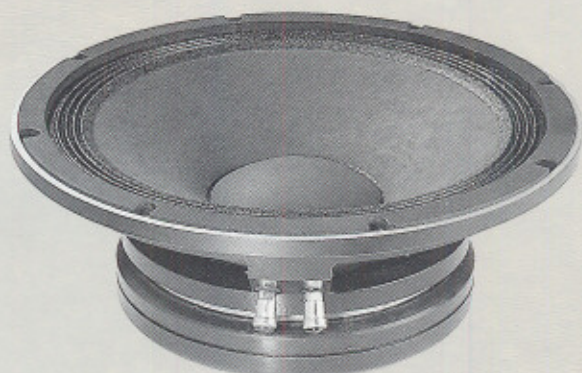

12 K 200

MODEL	12 G 250/R	12 G 320	12 K 200	10 G 200	10 G 150	8 M 100
Nominal Diameter	300 mm • 12 in	300 mm • 12 in	300 mm • 12 in	250 mm • 10 in	250 mm • 10 in	200 mm • 8 in
Power Capacity	200 w	150 w	250 w	200 w	125 w	100 w
Sensitivity 1 w @ 1m.	101 dB	104 dB	99 dB	97 dB	99 dB	100 dB
Frequency Range	40 • 4500 Hz	40 • 4500 Hz	35 • 4000 Hz	40 • 4000 Hz	50 • 6000 Hz	150 • 7000 Hz
Voice Coil Diameter	100 mm	100 mm	77 mm	77 mm	52 mm	38.5 mm
CUT OUT DIAMETER						
Front Mount	286 mm	286 mm	286 mm	240 mm	240 mm	185 mm
Rear Mount	275 mm	275 mm	275 mm	230 mm	230 mm	185 mm
Depth	130 mm	127 mm	128 mm	116 mm	111 mm	90 mm
THIELE - SMALL PARAMETERS						
Re { ohms }	6.2	6.2	6.3	6.3	6.8	7.2
Le { mH }	1	0.7	0.8	0.6	0.8	0.4
Fs { Hz }	41	52	35	52	47	90
Qts	0.17	0.18	0.22	0.32	0.24	0.44
Vas { l }	106	62	135	40	75	16
$\eta$ { % }	4	4.5	2.5	1.7	3	2.5
Xmax { mm }	2	1.5	4.5	3.5	2	1