

15" - 700W Bass Guitar Loudspeaker

15 BS 3 PL - 4 Ω

Code Z008143

GENERAL CHARACTERISTICS

Nominal Overall Diameter	388	mm
Nominal Voice Coil Diameter	75	mm
Magnet Weight	360	g
Flux Density.....	1.17	T
Weight.....	4.00	Kg

THIELE-SMALL PARAMETERS


Voice Coil DC Resistance	R_E	2.91	Ω
Resonance Frequency	f_s	42.3	Hz
Mechanical Q Factor.....	Q_{MS}	6.78	
Electrical Q Factor.....	Q_{ES}	0.38	
Total Q Factor	Q_{TS}	0.36	
Mechanical Moving Mass	M_{MS}	84.0	g
Mechanical Compliance	C_{MS}	168	μm/N
Force Factor	$B \times l$	13.14	Wb/m
Equivalent Acoustic Volume.....	V_{AS}	174.1	lt.
Maximum Linear Displacement	X_{MAX}	+/-4.5	mm
Reference Efficiency	η_0	3.37	%
Diaphragm Area	S_D	855.3	cm ²
Losses Electrical Resistance.....	R_{ES}	52.4	Ω
Voice Coil Inductance @ 1kHz	L_E	0.52	mH

CONSTRUCTIVE CHARACTERISTICS

Magnet.....	Neodymium
Voice Coil Winding.....	Aluminium
Voice Coil Former.....	Kapton
Cone	Paper
Surround.....	Treated Cloth
Dust Dome	Solid Paper
Basket	Aluminium Die-Cast


ELECTRICAL CHARACTERISTICS

Nominal Impedance.....	4	Ω
Musical Power	700	W
Rated Power*	350	W
Sensitivity @ 1 W, 1 m	98.9	dB

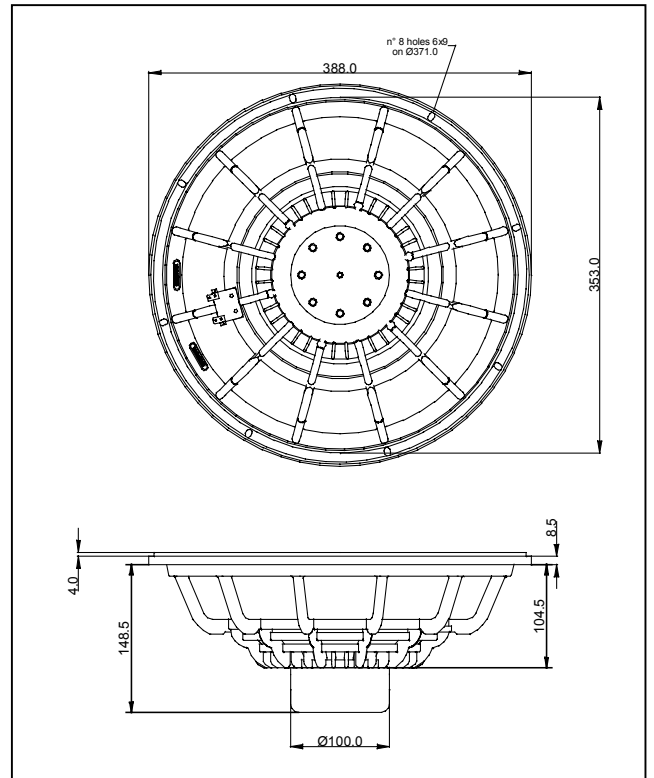

*rated power measured with 2 hours test with pink noise signal, 6 dB crest factor, loudspeaker mounted on enclosure
Thiele-Small parameters measured with LASER system

Frequency Response on IEC Baffle (DIN 45575) @ 1 W, 1 m - Impedance

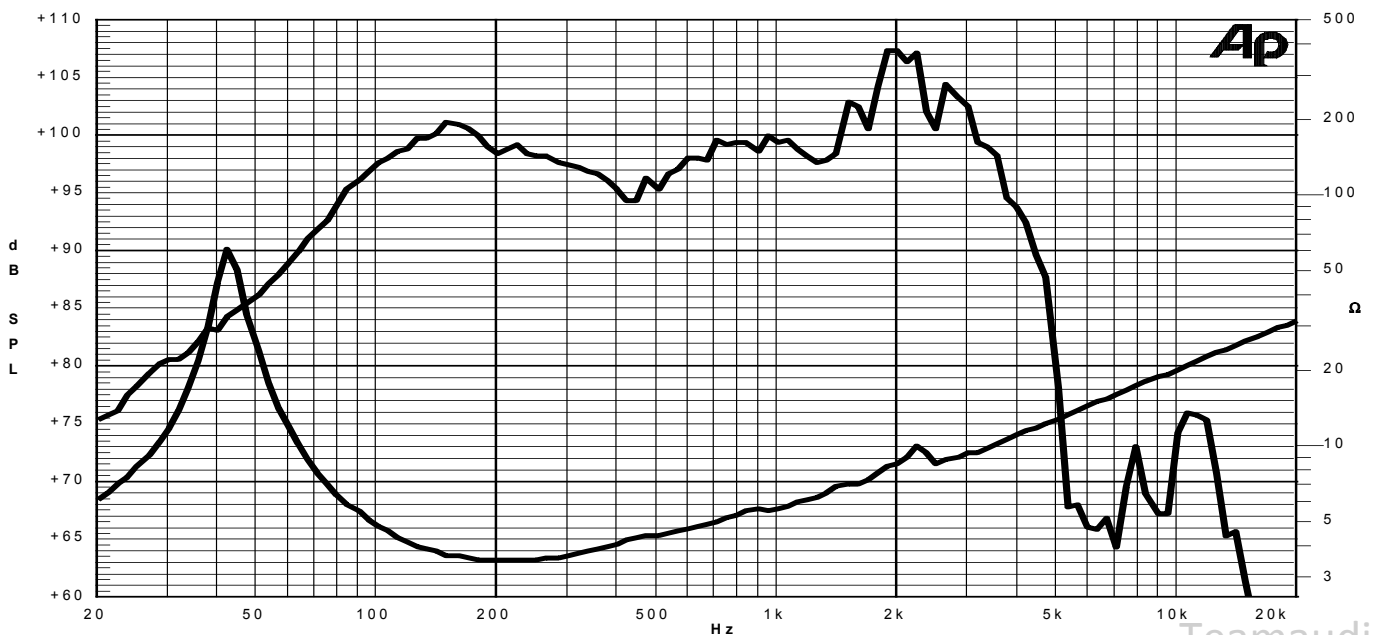

Due to continuing product improvement, the features and the design are subject to change without notice.

10/03/09